



| | |
|--|---|
| Type | : Rechargeable Nickel Metal Hydride Cylindrical Cell |
| Nominal Dimension (with Sleeve) | : $\Phi = 10.4\text{mm}$ H = 14.1mm |
| Applications | : Recommended discharge current 17 to 510mA |
| Nominal Voltage | : 1.2V |
| Capacity | : Nominal: 170mAh Minimum: 170mAh Typical: 180mAh When discharged at 34mA to 1.0V at 20°C |
| Charging Condition | : 17mA for 16 hrs at 20°C |
| Fast Charge | : 85mA to 170mA (0.5 to 1C) charge termination control recommended control parameters: - ΔV : 0-5mV **DT/dt : 0.8°C/min (0.5 to 0.9C) 0.8 - 1°C/min (1C) **TCO : 45 - 50°C **Timer : 105% nominal input ** for ref. only |
| Service Life | : >500 cycles (IEC standard) |
| Continuous Overcharge | : 17mA maximum current for 1 year. No conspicuous deformation and/or leakage |
| Weight | : 4.2g |
| Internal Resistance | : Average 120m Ω upon fully charged (Range 80 - 150m Ω) at 1000Hz |
| Max. Charging Voltage | : 1.5V at 17mA charging |
| Ambient Temperature Range | : Standard Charge : 0 to 45°C Fast Charging : 10 to 45°C Discharge : -20 to 50°C Storage : -20 to 35°C |

Model No.: **GP17AAAH**




Unit : mm


Low Rate Discharge

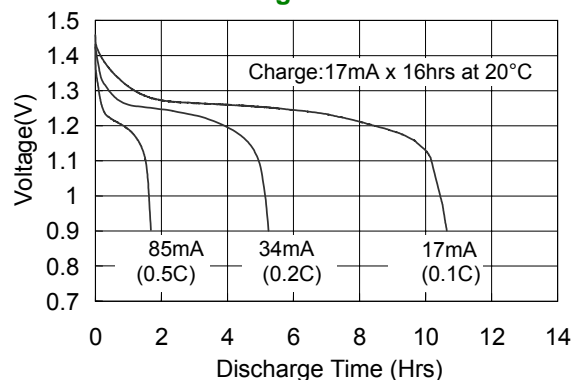

High Rate Discharge

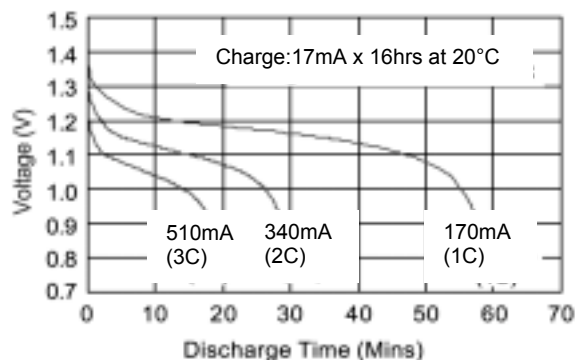

Fast Charge (Charge control required)

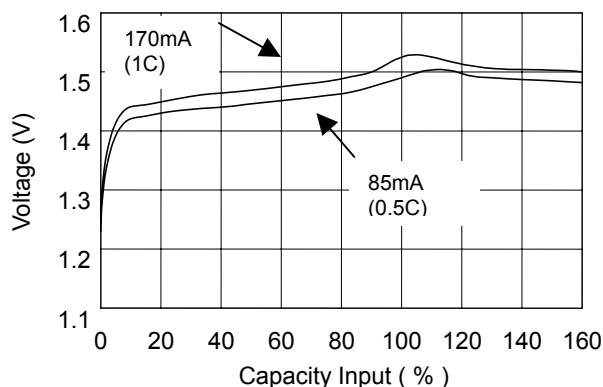

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.