


# Cell Type N-1900SCR

## Specifications


Nominal Capacity		1900mAh
Nominal Voltage		1.2V
Charging Current	Standard	190mA
	Fast	2900mA
Charging Time	Standard	14 to 16Hrs.
	Fast	about 1Hr.
Ambient Temperature	Charge	Standard 0 to 45 °C [32 to 113 °F] Fast 5 to 40 °C [41 to 104 °F]
	Discharge	-20 to 60 °C [-4 to 140 °F]
	Storage	-30 to 50 °C [-22 to 122 °F]
Internal Impedance(Av.) (at 50% discharge)		4mOhms (at 1000Hz)
Weight		54g/1.98oz
Dimensions(D)x(H) (with tube)		23.0 <sup>0</sup> <sub>-1</sub> x 43 <sup>0</sup> <sub>-1.5</sub> mm 0.91 <sup>0</sup> <sub>-0.04</sub> x 1.69 <sup>0</sup> <sub>-0.06</sub> inch

### Typical Characteristics


Charge Characteristics (5 cells pack)

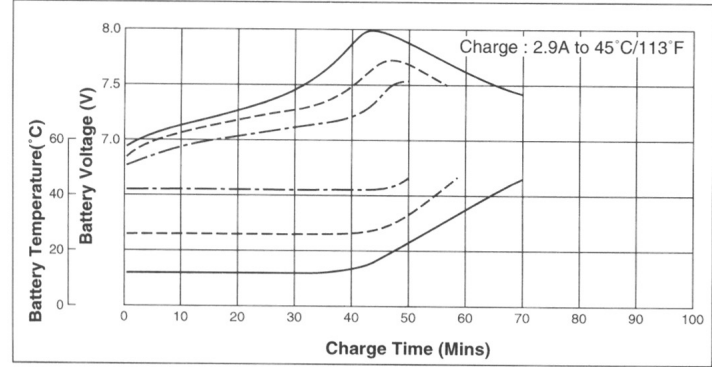


Discharge (at high rate)

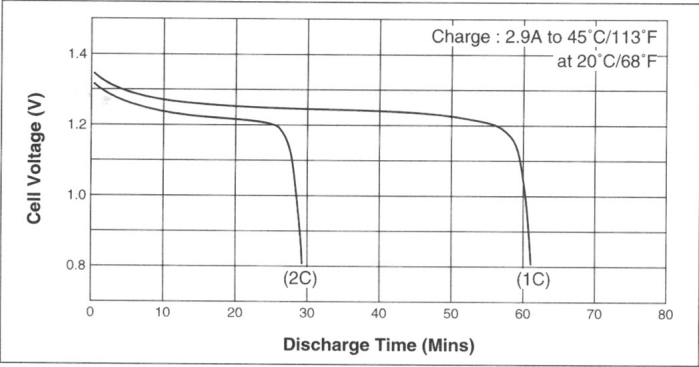


Cell Capacity (at various discharge rate)

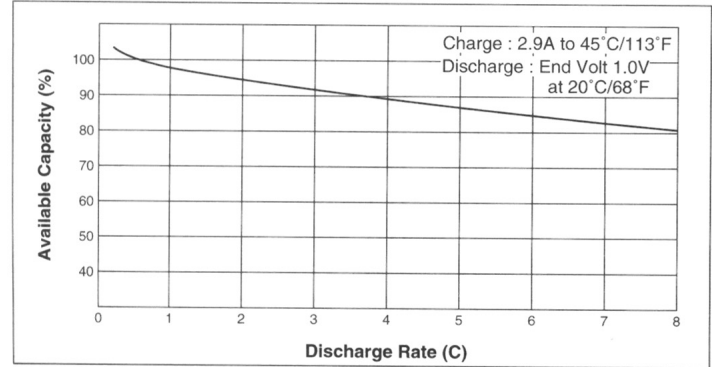

Discharge (at high rate)

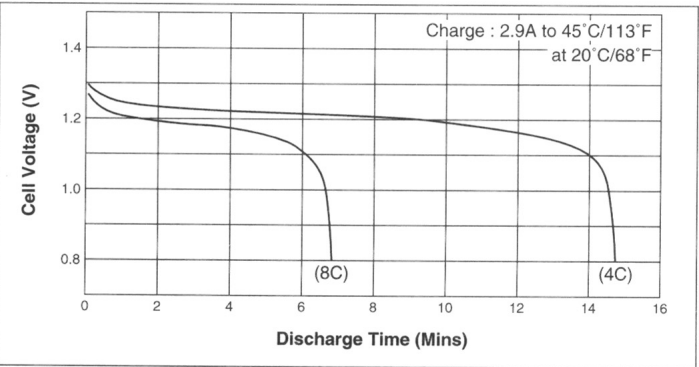

Discharge (at low rate)

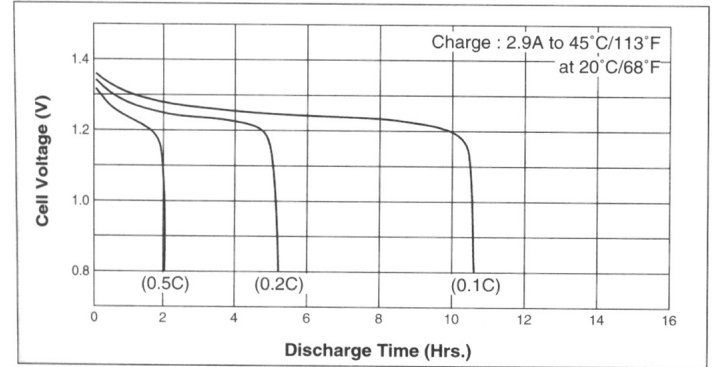

Temperature (Charge & Discharge)

